


OAKION®

Waterproof Multi Parameter PCSTestr™ 35

Data Sheet

- Our most versatile pocket-sized meter – Five measurements in one instrument!
- Displays measured value along with temperature – simply press a key to toggle between pH, Conductivity, TDS, and Salinity
- Waterproof, dustproof housings float
- Push-button calibration, HOLD function, and error messages

Never watch a tester sink to the bottom of your tank or pond! These waterproof testers float, so there's no need to worry. Valox® housing and stainless steel electrodes offer good chemical compatibility and durability. All waterproof Testrs have replaceable sensors. Reuse the meter body many times without losing waterproof and dustproof protection.

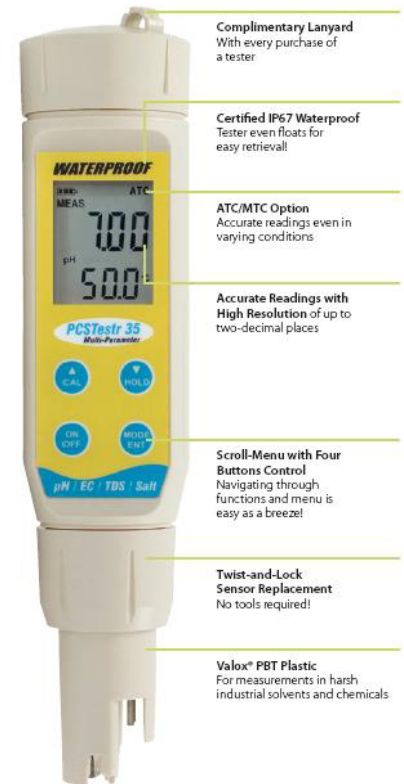

Complimentary Lanyard
With every purchase of a tester

Certified IP67 Waterproof
Tester even floats for easy retrieval!

ATC/MTC Option
Accurate readings even in varying conditions

Accurate Readings with High Resolution of up to two-decimal places

Scroll-Menu with Four Buttons Control
Navigating through functions and menu is easy as a breeze!

Twist-and-Lock Sensor Replacement
No tools required!

Valox® PBT Plastic
For measurements in harsh industrial solvents and chemicals

WD-35425-10

Specifications & Ordering Information

Catalog number	WD-35425-10			
Description	Waterproof PCSTestr 35			
Range				
Conductivity	0 to 199 µS	1 to 1999 µS	2.00 to 20.00 mS	
TDS	0 to 99.9 ppm	100 to 999 ppm	1.0 to 10.00 ppt*	
Salinity	0 to 99.9 ppm	100 to 999 ppm	1.0 to 10.00 ppt*	0.0 to 1.00%
pH	0.0 to 14.0			
Temperature	-0.0 to 50.0°C			
Resolution				
Conductivity	0.1 µS	1 µS	0.01 mS	
TDS	0.1 ppm	1 ppm	0.01 ppt	
Salinity	0.1 ppm	1 ppm	0.01 ppt	0.01%
pH	0.1 pH			
Temperature	0.1°C			
Accuracy	pH: ±0.1 pH, Conductivity, TDS, Salinity: ±1% full scale, Temperature: ±0.5°C, ±0.9°F			
Temperature compensation	Automatic, 0 to 50°C; 2% per °C			
Calibration	One-point push-button calibration			
Power	Four 1.5 V alkaline batteries (included)			
Display	4-digit LCD, dual line			
Dimensions	6 1/2"L x 1 1/2"W x 1 1/2"H			

*Maximum TDS range based on TDS factor of 0.5

Accessories

WD-35425-50 Replacement sensor

WD-09377-16 Replacement batteries, 1.5 V. Pack of six

WD-35624-45 Beltloop Carrying Pouch

NOVA-TECH
INTERNATIONAL

800 Rockmead Dr Ste 102 • Houston, TX 77339-2496
Tel: (281) 359-8538 • Toll Free Tel: (866) 433-6682
Fax: (281) 359-0084 • Toll Free Fax: (866) 433-6684
sales@novatech-usa.com • www.novatech-usa.com