

# Corporation Stop Assemblies



## The Corporation Stop nozzle assembly

is supplied in .75in. and 1.0in. sizes and are available in both NPT (male) and AWWA (male) pipe connection. Corporation Stops provide two distinct advantages over a simple tap connection into large main pipes:


1. The nozzle may be extended for injection near the center of a large main for more effective chemical dispersion.
2. The nozzle assembly may be withdrawn and the corporation stop closed without interrupting the use of the main.

- **PVC or CPVC Nozzles**
- **Brass corporation stop**
- **150 PSI (10 BAR) Maximum pressure**
- **7 3/4" (196mm) nozzle insertion depth**
- **Stainless Steel Safety cable**

**Models J61135/J61462** corporation stops are supplied with a .38in. (9.5mm) diameter. injection pipe(PVC) with a .5 NPT (female) injection valve connection and a .75 NPT(male) connection to the main. Rated pressure is 150 psi maximum.

**Model J61191** corporation stop is supplied with a .50in. (12.7mm) diameter. injection pipe(PVC) with a .5 NPT(female) injection valve connection and a 1.0 NPT(male) connection to the main. Rated pressure is 150 psi maximum.

**Model J61136** corporation stop is supplied with a .50in. (12.7mm) diameter. injection pipe(PVC) with a .5 NPT(female) injection valve connection and a 1.0 AWWA (male) connection to the main. Rated pressure is 150 psi

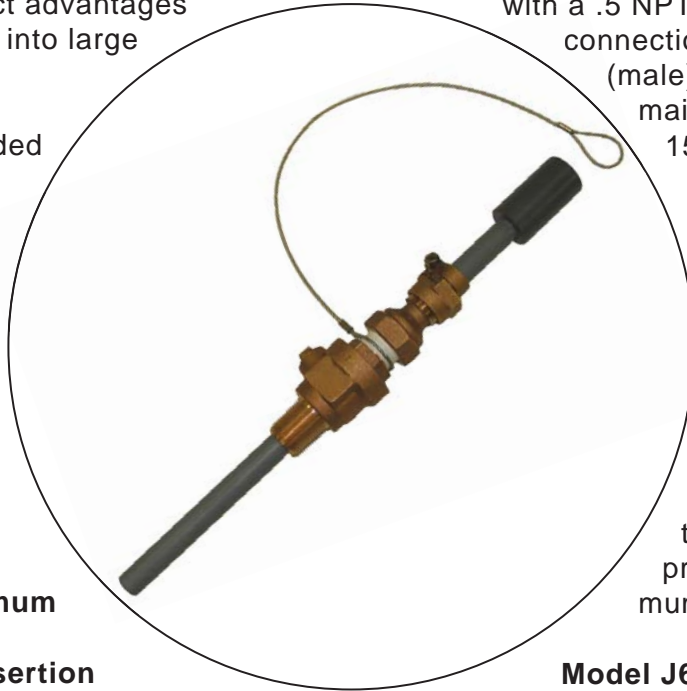


**Models J61135-C/J-1462-C** corporation stops are supplied with a .38in.(9.5mm) diameter. injection pipe(CPVC) with a .5 NPT(female) injection valve connection and a .75 NPT(male) connection to the main. Rated pressure is 150 psi maximum.

**Model J61191-C** corporation stop is supplied with a .50in. (12.7mm) diameter. injection pipe(CPVC) with a .5 NPT(female) injection valve connection and a 1.0 NPT(male) connection to the main. Rated pressure is 150 psi maximum.



**Model J61136-C** corporation stop is supplied with a .50in. (12.7mm) diameter. injection pipe(CPVC) with a .5 NPT(female) injection valve connection and a 1.0 AWWA(male) connection to the main. Rated pressure is 150 psi maximum.

# Corporation Stop Assemblies

MODEL #J61135 / J61462

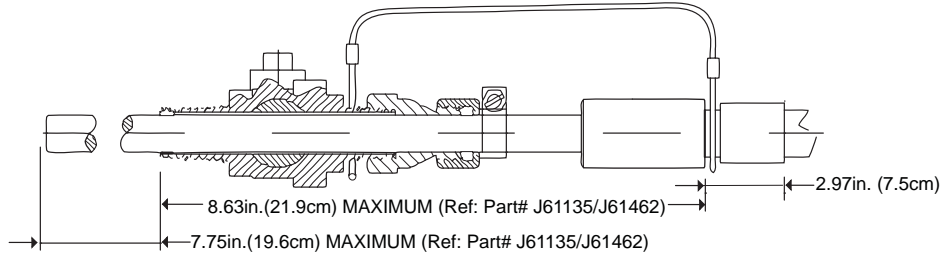

MODEL #J61136 / J61191

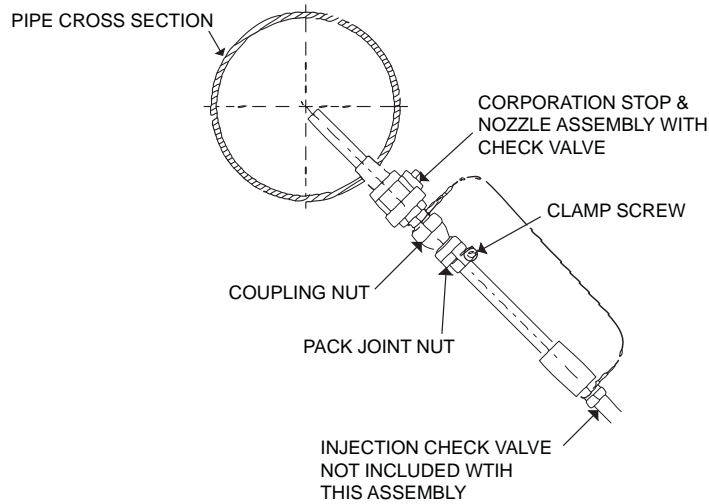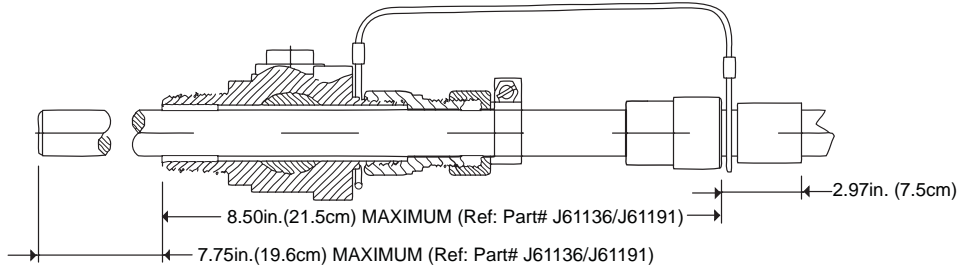

An ISO Certified Company



A Unit of IDEX Corporation



800 Rockmead Dr Ste 102 • Houston, TX 77339-2496  
 Tel: (281) 359-8538 • Toll Free Tel: (866) 433-6682  
 Fax: (281) 359-0084 • Toll Free Fax: (866) 433-6684  
 sales@novatech-usa.com • www.novatech-usa.com