

MEC-O-MATIC

Series T-2000

Programmable Misting System



Powerful new misting system delivers consistent doses of deodorizers and other solutions.



- Rapid pulsing, reliable diaphragm metering pump.
- Programmable 24-hour day timer provides versatile operation and settings.
- High quality, stainless steel atomizing tip and solid brass body.
- Rugged, corrosion-resistant housing with lockable latch.
- Prime switch.
- On-Off indicator light.
- Designed for easy wall or shelf mounting.
- Bulkhead fitting for secure installation of misting nozzle.

Featuring the powerful SR 275 diaphragm metering pump, the SERIES T-2000 provides capability and reliability not available in peristaltic systems.

Advantages:

- *Consistent misting pattern for maximum effectiveness.*
- *Diaphragm metering pump provides capacity of 180cc/6 oz. per minute at 100 PSI.*
- *Wide angle misting nozzle provides optimum pattern.*

Applications:


- *Uses deodorizers, sanitizers, insecticides, and many other solutions.*
- *For refuse containers, recycling centers, waste treatment facilities, slaughterhouses, agriculture, and many other situations.*

technology
innovation diversity
excellence



Series T-2000 Specifications

Programmable Misting System

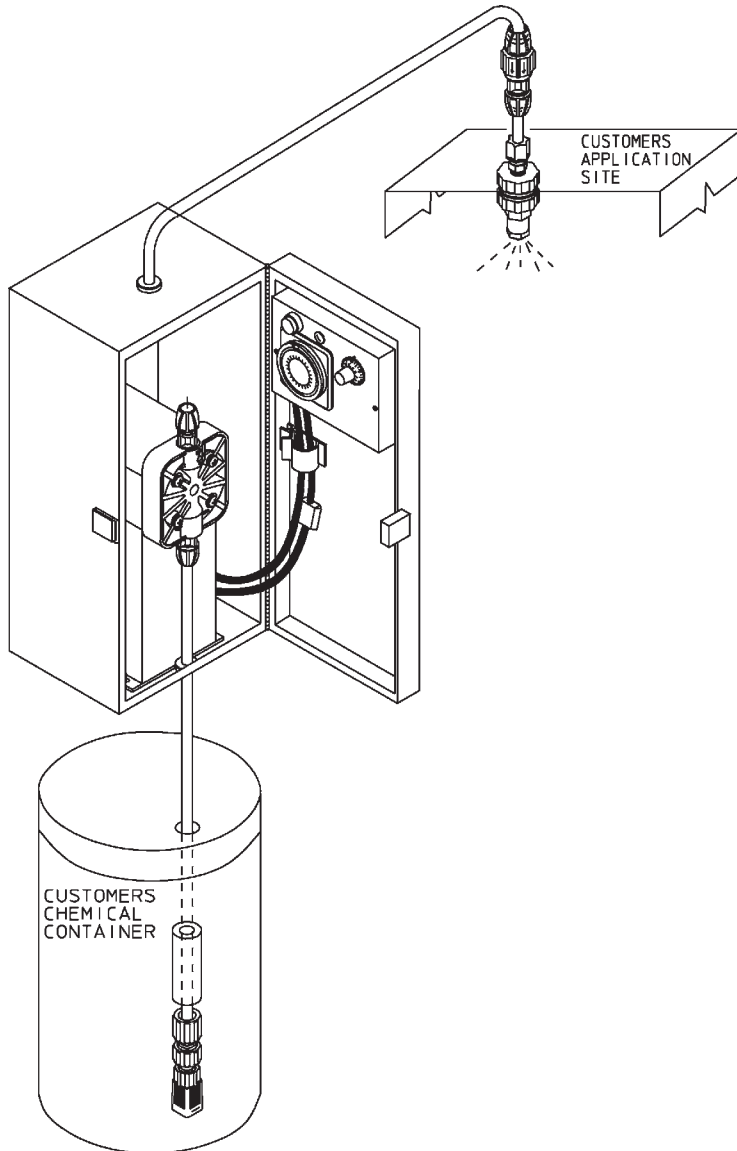

WARRANTY

The manufacturer warrants the equipment of its manufacture to be free of defects in material or workmanship. Liability under this policy extends for eighteen (18) months from the date of purchase or one (1) year from date of installation or whichever comes first. The manufacturer's liability is limited to repair or replacement of any device or part which is returned, prepaid, to the factory and which is proven defective upon examination. This warranty does not include installation or repair cost and in no event shall the manufacturer's liability exceed its selling price of such part.

The manufacturer disclaims all liability for damage to its products through improper installation, maintenance, use or attempts to operate such products beyond their functional capacity, intentionally or otherwise, or any unauthorized repair. Replaceable elastomeric parts are expendable and are not covered by any warranty either expressed or implied. The manufacturer is not responsible for consequential or other damages, injuries, or expense incurred through use of its products.

The above warranty is in lieu of any other warranty, either expressed or implied. The manufacturer makes no warranty of fitness or merchantability. No agent of ours is authorized to make any warranty other than the above.

SYSTEM HOUSING

Durable, corrosion-resistant housing with lockable latch, ideal for outdoor installations.

METERING PUMP

The MEC-O-MATIC Stingray Series 275 diaphragm metering pump provides reliability, positive displacement, and adjustable feed rates. Powered by a lifetime lubricated, continuous-rated, heavy duty motor.

HEAD: PVC
DIAPHRAGM: PTFE
VALVE: Ceramic Ball
Check Valves
VALVE SEATS: Viton
FITTING: PVC

OPTIONAL MATERIALS

HEAD Polyethylene
Valve Polyethylene

TIMER

The 24-hour programmable day timer allows up to 48 settings per day. Doses can be adjusted from 6 seconds to 9 minutes 54 seconds within each setting.

ACCESSORIES

Includes UV-inhibited polyethylene tubing, strainer, bulkhead fitting and stainless steel atomizing tip and solid brass body.



An ISO Certified Company



A Unit of IDEX Corporation



800 Rockmead Dr Ste 102 • Houston, TX 77339-2112
Tel: (281) 359-8538 • Toll Free Tel: (866) 433-6682
Fax: (281) 359-0084 • Toll Free Fax: (866) 433-6684
sales@novatech-usa.com • www.novatech-usa.com